




CALL 1-815-790-4494



- Dual Band** *Built-in VOX Function*
- Priority Scan** *PC Programmable/Keypad*
- Busy Channel Lock** *Wide/Narrow Bandwidth*

- Dual Band
- FM Radio
- Dual-watch Operation
- Compact
- 100 Channels
- Li-ion Battery(1500mAh)
- Alpha-Numeric Display
- CTCSS/DCS
- Voice Scrambler
- Power Switch: 4W/2W/1W

DB - ANDY

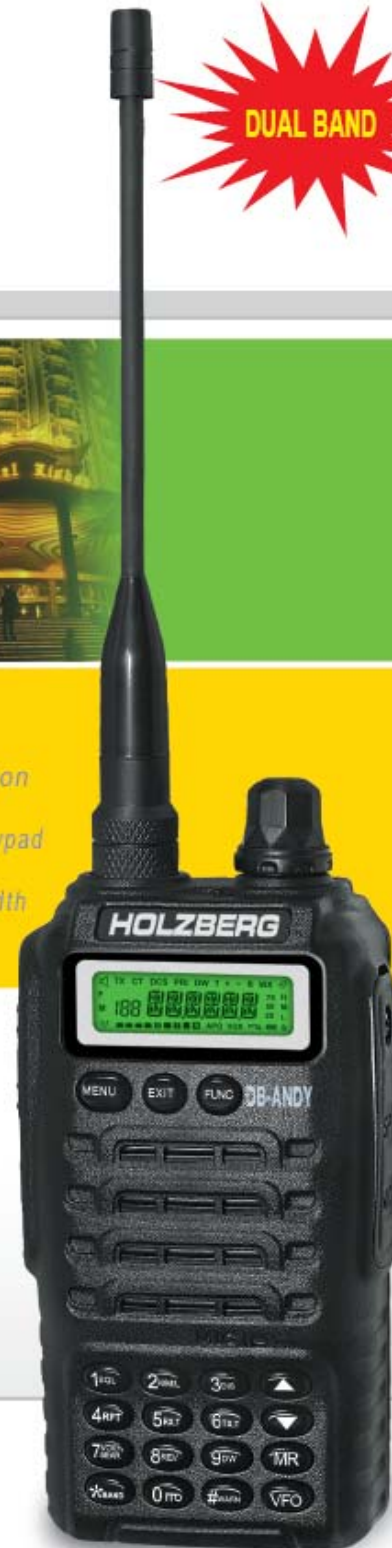



Dual Band Professional FM Transceiver

- | | | |
|-------------------------|----------------------------|--------------------------------|
| 1. Dual Band | 6. Power Switch: 4W/2W/1W | 11. Busy Channel Lockout |
| 2. FM Radio | 7. Built-in VOX Function | 12. Cloning Cable |
| 3. Voice Scrambler | 8. Priority Scan | 13. Alarm Function |
| 4. CTCSS/DCS | 9. Wide/Narrow Bandwidth | 14. Auto Search CTCSS/DCS Code |
| 5. Dual-watch Operation | 10. PC Programmable/Keypad | |

SPECIFICATIONS		TRANSMITTER		RECEIVER	
Frequency Range	FM(Receive): 88-108MHz VHF: 136-173.995MHz UHF1(Receive): 360-389.995MHz UHF2: 420-490MHz UHF3(Receive): 470-519.995MHz	Output Power	High *4W Medium *2W Low *1W	RF Sensitivity	-122dBm(12dB SINAD)
		Emission Current	*1.5A(4W)	Audio Power	<0.5W
Rated Voltage	DC 7.2V	Modulation Sensitivity	12mV	Audio Distortion	<10%
Memory Channels	100	Modulation Distortion	<5%	Audio Response	6dB
Channel Step	5/6.25/10/12.5/15/20/25/30/50/ 100kHz	Modulation Limiting	Wide: <5kHz Narrow: <2.5kHz	Spurious Rejection	*65dB
Frequency Sensitivity	5 PPM	CTCSS/DCS Frequency Deviation	Wide: 0.75kHz*50Hz Narrow: 0.37kHz*30Hz	Adjacent Channel Selectivity	*65dB *60dB
Antenna Impedance	50	Spurious Radiation	<7μW	Intermodulation	*60dB *55dB
Dimensions	4.33"X2.20"X1.46"	Modulation Mode	16KϕF3E/11KϕF3E	Blocking	*85dB
Weight	0.57 lbs	Modulation Character	6dB		

STANDARD ACCESSORIES



Battery



Charger



Adapter



Antenna

OPTIONAL ACCESSORIES



Headset/Mic



Speaker/Mic



Programming Cable



CALL 1-815-790-4494